

Living at the Edge: A Large Deviations Approach to the Outage MIMO Capacity

Pavlos Kazakopoulos, Panayotis Mertikopoulos, Aris L. Moustakas and Giuseppe Caire

Abstract—Using a large deviations approach we calculate the probability distribution of the mutual information of MIMO channels in the limit of large antenna numbers. In contrast to previous methods that only focused at the distribution close to its mean (thus obtaining an asymptotically Gaussian distribution), we calculate the full distribution, including its tails which strongly deviate from the Gaussian behavior near the mean. The resulting distribution interpolates seamlessly between the Gaussian approximation for rates R close to the ergodic value of the mutual information and the approach of Zheng and Tse [1] for large signal to noise ratios ρ . This calculation provides us with a tool to obtain outage probabilities analytically at any point in the (R, ρ, N) parameter space, as long as the number of antennas N is not too small. In addition, this method also yields the probability distribution of eigenvalues constrained in the subspace where the mutual information per antenna is fixed to R for a given ρ . Quite remarkably, this eigenvalue density is of the form of the Marčenko-Pastur distribution with square-root singularities, and it depends on the values of R and ρ .

I. INTRODUCTION

Considerable interest has arisen from the prediction [2], [3] that the use of multiple antennas in transmitting and receiving signals can lead to substantial gains in information throughput. To analyze the theoretical limits of such a MIMO (Multiple Input Multiple Output) system, it has been convenient to focus on the case of i.i.d. Gaussian noise and input. For the MIMO channel model

$$\mathbf{y} = \mathbf{H}\mathbf{x} + \mathbf{z} \quad (1)$$

with coherent detection and no channel state information at the transmitter [2], [3], the mutual information I_N for a given value of the channel matrix $\mathbf{H}$ takes the familiar form:

$$I_N = \log \det (\mathbf{I} + \rho \mathbf{H}^\dagger \mathbf{H}). \quad (2)$$

where “log” signifies the natural logarithm, ρ is the signal to noise ratio and $\mathbf{H}$ is the $M \times N$ channel matrix whose elements are independent $\mathcal{CN}(0, 1/N)$ random variables. This corresponds to the case of N transmitting and M receiving antennas and we can define the ratio as $\beta = M/N$. Without loss of generality we assume that $\beta = M/N \geq 1$; otherwise, if $\beta < 1$, we may simply replace ρ with $\rho_{\text{new}} = \rho\beta$ in (2) and interchange the roles of M and N .

If the channel matrix $\mathbf{H}$ varies in time according to a stationary and ergodic process, and coding spans an arbitrarily

large number of fading states, then the “ergodic” channel capacity is given by the mutual information expected value $\mathbb{E}(I_N)$ [3]. In that case, the gains of the use of multiple antennas have been analytically quantified by assuming that the number of antennas N is large while β remains fixed and finite; accordingly, $\mathbf{H}$ can be viewed as a large random matrix. Then, by applying ideas and methods from the theory of random matrices, it was shown in [5] that the value of the mutual information per antenna $I(\rho, \mathbf{H})/N$ “freezes” to a deterministic value in the large N limit, the so-called *ergodic average* $r_{\text{erg}}(\rho)$. Underlying this result is the fact that the very eigenvalue distribution of $\mathbf{H}^\dagger \mathbf{H}$ freezes to the celebrated Marčenko-Pastur distribution:

$$p(x) = \frac{\sqrt{(b-x)(x-a)}}{2\pi x} \quad (3)$$

where $a, b = (\sqrt{\beta} \pm 1)^2$ are the end-points of its support.

However, another interesting regime for this channel is represented by the case where the channel matrix is random, but it varies in time much more slowly than the typical coding delay. In this case, usually referred to as the “quasi-static” fading channel, $\mathbf{H}$ can be considered as a random constant and the mutual information I_N is a random variable. In this regime, the relevant performance metric is the “rate versus outage probability” tradeoff [4], captured by the cumulative distribution function of I_N . Various approaches [6]–[8] have shown that the outage probability $P_{\text{out}}(R) := \mathbb{P}(I_N \leq R)$ becomes asymptotically Gaussian for large N , with mean equal to the ergodic capacity $R_{\text{erg}} = Nr_{\text{erg}}(\rho)$ and a variance of order $\mathcal{O}(1)$ in N . This Gaussian variability of the mutual information is due to the fluctuations of the eigenvalues of the matrix away from the most probable distribution described by the Marčenko-Pastur law. Since this Gaussian approximation is essentially a variation of the central limit theorem, it only applies within a small number of standard deviations away from R_{erg} . As a result, this approximation fails to capture the tails of the distribution, e.g. the probability of the rate R falling to half its ergodic value $R_{\text{erg}}/2$, because this event only occurs $\mathcal{O}(N)$ standard deviations away from the mean.

Hence, the tails of the distributions of the mutual information are important, because they correspond to regions with low outage probability, where one would want to operate a MIMO system. The interplay between low outage and multiplexing gain was exemplified in the seminal paper [1] where the authors analyzed the asymptotics of the distribution of the mutual information in the limit of large ρ (keeping $R/\log \rho$ fixed). They found that the asymptotic form of the logarithm of the distribution of the mutual information is a

P. Kazakopoulos (pkazakop@phys.uoa.gr), P. Mertikopoulos (pmer-tik@phys.uoa.gr) and A. L. Moustakas (arism@phys.uoa.gr) are with the Physics Dept., Athens Univ., 157 84 Athens, Greece. G. Caire (caire@usc.edu) is with the EE - Systems Dept., Univ. Southern California Los Angeles, CA 90007, USA. Part of this paper was presented in the 2009 IEEE Information Theory Workshop (ITW '09) in Volos, Greece.

piecewise linear function of $R/\log \rho$, interpolating between the discrete set of values:

$$\log P_{\text{out}}(R_n) \sim -\frac{(R_n - M \log \rho)(R_n - N \log \rho)}{\log \rho} \quad (4)$$

where the intermediate rates are given by $R_n = n \log \rho$ for integer $n \leq N \leq M$.¹ When, in addition to ρ , N is also large, $\log P_{\text{out}}(R)$ in (4) becomes (to leading order) a continuous function of R/N . It should be pointed out that this result is complementary to the large N asymptotics discussed above, since it provides insight in the distribution of the mutual information quite far from its peak which, for large ρ (and large N) is situated at $I_N \sim N \log \rho$. However, this expression does not give any quantitative estimates of the outage for finite ρ and therefore cannot be used for realistic outage predictions.

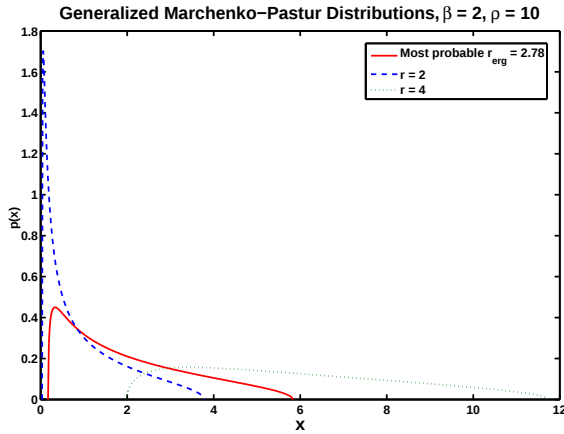


Fig. 1. Generalized MP distributions for SNR=10dB and different values of r

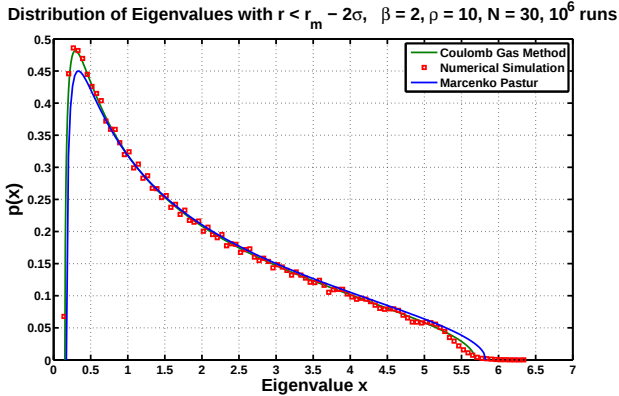


Fig. 2. Comparison of MP distribution and distribution resulting from shifting the rate by two standard deviations from the most probable r_{erg} . The agreement is quite remarkable with the numerical distribution.

In the meantime, all variants of the large N Gaussian approximation of the mutual information [6]–[8] fail spectacularly for large ρ , even near the peak of the distribution.

¹It should be noted that [1] analyzed the outage CDF $F_{I_N}(R) = \mathbb{P}(I_N < R)$ rather than the probability density $P(R) \equiv F'_{I_N}(R)$. However for large ρ and $R_n < N \log \rho$ both expressions are identical up to $\mathcal{O}(1)$ corrections.

Specifically, they all predict that the outage probability is given asymptotically by:

$$\log P_{\text{out}}(R) \sim -\frac{(R - N \log \rho)^2}{2 \log(1 - \beta^{-1})} \quad (5)$$

where $\beta = M/N > 1$, an expression which is in striking disagreement to (4). Even though for $\beta = 1$ the asymptotic form of (4) is recovered within the Gaussian approximation [6], [8], the discrepancy for $\beta \neq 1$ indicates that the limits $N \rightarrow \infty$ and $\rho \rightarrow \infty$ cannot be naïvely interchanged. When one takes the large N limit first, one focuses on the most probable eigenvalue distribution, which converges vaguely to the Marčenko-Pastur distribution (3). However, as can be seen in (3), this distribution (almost surely) produces no eigenvalues close to zero when $\beta > 1$. Nevertheless, the analysis for large ρ focuses at the regime where the eigenvalues are of order $z \equiv \rho^{-1}$. As a result, it is not surprising that the large- N Gaussian approximation of the mutual information distribution misses the correct behavior.

In summary, we have two methods, the large- N , fixed- ρ Gaussian approximation on the one hand and the large- ρ , fixed- N limit on the other, both having their own regions of validity, and both failing to produce quantitative results for the outage probability outside their respective regions. Thus, one still needs an approach that correctly describes the outage behavior of the mutual information distribution for arbitrary ρ and R .

In this paper, we introduce a large deviations approach to calculate the full asymptotic distribution of R . It is formally valid for large N , but works over the whole range of values of R and ρ . This method bridges the two regions of small/intermediate and large signal to noise ratios within a single framework and, in effect, it amounts to calculating the rate function of the logarithm of the average moment generating function of the mutual information. Our approach was first introduced in the context of random matrix theory by Dyson [9] and has been more recently discussed in [10]. It is quite intuitive because it interprets the eigenvalues of $\mathbf{H}^\dagger \mathbf{H}$ as point charges repelling each other logarithmically. As a byproduct of this approach, we obtain the most probable eigenvalue distribution constrained over the subspace of fixed total rate R and signal to noise ratio ρ . This is a generalized Marčenko-Pastur distribution that gives the constrained eigenvalue distribution for values of R far from its ergodic value. It is worth pointing out that many of the results presented here could be set on a more formal mathematical footing using tools developed in [11]. However, we will follow the less formal but more intuitive approach developed by Dyson.

This generalized Marčenko-Pastur distribution can also be seen as the inverse of the so-called *Shannon transform* [12] in the following sense: while the Shannon transform produces the value of normalized mutual information I_N/N as a functional of the asymptotic eigenvalue distribution of $\mathbf{H}^\dagger \mathbf{H}$ (the Marčenko-Pastur distribution), the generalized Marčenko-Pastur distribution introduced here boils down to the asymptotic eigenvalue distribution of $\mathbf{H}^\dagger \mathbf{H}$ for a given value of the mutual information $R = Nr$, i.e., when $\mathbf{H}^\dagger \mathbf{H}$ is constrained on the subspace defined by $r = I_N/N$.

A. Outline

In the next section we will introduce the necessary mathematical methodology. In particular, Section II-A describes the mapping of the joint probability distribution of eigenvalues of the Wishart matrix to a Coulomb gas of charges with a continuous density (discussed in more detail in Appendix B) and the large-deviations analysis of the problem. Next, section II-B deals with the solution of the resulting integral equation that produces the most-likely eigenvalue distribution at the tails of the full distribution.

If one is not particularly interested in the details of our derivation, section II can be skipped in favour of section III wherein we present our main results. Specifically, in section III-A we rederive the Marčenko-Pastur distribution (that is, the most likely distribution without any mutual information constraint) to highlight the efficacy of our method. Subsequently, sections III-B and III-C contain our results for the cases $\beta > 1$ and $\beta = 1$ respectively, while in section III-D we show how to calculate the outage probability directly by means of the results of the previous sections. Finally, in section IV we obtain previous results as limiting cases of this method, and also examine a number of different limiting cases.

The proofs of the properties of *tame* distributions that we introduce in section II-A are given in appendix A and in appendix B we discuss Dyson's original construction of the Coulomb gas model. Finally, in appendices C and D have been reserved for the exposition of some technical issues that cropped up during our calculations.

II. METHODOLOGY

Our approach can roughly be divided in two main parts. First, in section II-A we reduce the original problem of finding the probability distribution of the mutual information to harvesting the minimum energy of a gas of charged particles (among other things we show here that the minimum energy configuration is unique). Then, in section II-B, we will solve the integral equation that comes up and actually obtain the minimum energy configuration of the charges.

Readers who are not interested in the mathematical intricacies of our work may skip this section altogether and proceed to our results in section III.

A. Mapping the Problem to a Coulomb Gas

We begin by establishing our mathematical methodology, treading on the elegant footsteps of [13], [14]. Our overall aim will be to calculate the probability distribution of the mutual information (2), which can be written in terms of the eigenvalues λ_k of the Wishart matrix $\mathbf{H}^\dagger \mathbf{H}$ as:

$$I_N = \sum_{k=1}^N \log(1 + \rho \lambda_k) \quad (6)$$

Note that the aforementioned probability distribution of the mutual information thus depends on the joint probability distribution of the eigenvalues $\lambda_1 \dots \lambda_N$ of $\mathbf{H}^\dagger \mathbf{H}$. In its turn,

this distribution takes the well-known form:

$$P_\Lambda(\lambda_1 \dots \lambda_N) = A_N \Delta(\lambda_1 \dots \lambda_N)^2 \prod_{k=1}^N \lambda_k^{M-N} e^{-N\lambda_k} \quad (7)$$

$$= A_N e^{-N^2 E(\lambda)} \quad (8)$$

where A_N is a normalization constant and $\Delta(\lambda_1 \dots \lambda_N) = \prod_{i>j} (\lambda_i - \lambda_j)$ is the Vandermonde determinant of the eigenvalues λ_k . As for the exponent $E(\lambda)$, this is an energy functional that will become very useful later on:

$$E(\lambda) = \frac{1}{N} \sum_k (\lambda_k - (\beta - 1) \log \lambda_k) + \frac{2}{N^2} \sum_{j>k} \log |\lambda_j - \lambda_k| \quad (9)$$

Note that the normalization we have chosen is such that $E(\lambda)$ corresponds roughly to the energy per eigenvalue.

The cumulative probability distribution (CDF) of the normalized mutual information I_N/N can then be written as a ratio of two volumes in λ -space:

$$F_N(r) = \mathbb{P}(I_N/N \leq r) = \frac{V_r}{V_{\text{tot}}} = \frac{\int P_\Lambda(\lambda) \Theta(r - I_N/N) d\lambda}{\int P_\Lambda(\lambda) d\lambda} \quad (10)$$

where I_N is given by (6), $\Theta(x)$ is the Heaviside step function ($\Theta(x) = 1$ $x > 0$ and $\Theta(x) = 0$ if $x < 0$) and the integrals are taken w.r.t. ordinary N -dimensional Lebesgue measure $d\lambda = \prod_i d\lambda_i$. The above CDF is by definition the outage probability for the normalized mutual information to fall below r and its corresponding probability density can be obtained from (11) by taking the derivative with respect to r [15]:

$$P_N(r) = F'_N(r) = \frac{\int P_\Lambda(\lambda) \delta(r - I_N/N) d\lambda}{\int P_\Lambda(\lambda) d\lambda} \quad (11)$$

where we have used the fact that the derivative of the step function is the Dirac δ -function: $\Theta'(x) = \delta(x)$.

Our primary goal will be to use (11) in order to obtain an analytic expression for the probability distribution function of the mutual information I_N . However, even though V_{tot} is the Laguerre-Selberg integral which is known in closed form [16], in general there is no standard way to evaluate integrals like V_r (except for some special cases [17]). Nevertheless, in the large N -limit it is possible to analyze these integrals in a systematic way. This so-called Coulomb-gas approach [16] is based on the intuitive idea to interpret the eigenvalues λ as the positions of N positive unit charges located on a line, a picture first proposed by Dyson [9]. Within this interpretation, the last term in the exponent of (7) corresponds to the logarithmic repulsion energy, while the first term is the potential due to a constant field and the second term is the repulsion of a point charge located at the origin.² Using standard large-deviations ideas, it is then easy to see that for large N the configuration of eigenvalues that minimizes the energy $E(\lambda)$ and which is consistent with the added constraints will become increasingly more probable and end up determining the distribution $P_N(r)$ itself.

Now, it is instructive to look at the form of $E(\lambda)$ to get an intuitive understanding of the minimum energy configuration

²Note that these are simply the potentials that one obtains in classical two-dimensional electrostatics.

of λ in the absence of the constraint $I_N/N = r$. As discussed above, the first two terms in $E(\lambda)$ correspond to the external forces acting on the charges, while the last term represents the repulsion between charges. In the absence of the charge repulsion the minimum energy configuration will correspond to all charges settling at the minimum of the external potential, i.e. $\lambda_k = \beta - 1$ for all $k = 1, \dots, N$. Of course, the repulsion between charges will make the charges move away from that point but still, from simple electrostatics considerations, it is not expected that this repulsion will carry charges too far away from the minimum. As a result, we expect that at the minimum of $E(\lambda)$ all charges will be concentrated in the neighborhood of $\beta - 1$. As the number of charges increases, it will make sense, at least for configurations with energy $E(\lambda)$ close to the minimum, to assume that the charge distribution will be approximately a *continuous* distribution. As a result, all sums over λ in $E(\lambda)$ may be replaced by integrals. We expect that this assumption will hold also in the presence of constraints as in (11).

It is therefore more convenient to focus only on continuous distributions, whose mathematical analysis is much more tractable. We will thus allow ourselves to be guided by our intuition and introduce:

Conjecture 1 (Coulomb Gas). In the large N limit the charge distribution P_N converges weakly to an absolutely continuous density $p(x)$, $x \geq 0$. In other words, as $N \rightarrow \infty$ the total charge in any interval $I \subseteq \mathbb{R}$ will be given by:

$$\sigma(I) = \int_I p(x) dx. \quad (12)$$

This assumption is essentially identical to the one in Mehta's book [16] and has been extensively employed in the literature [9], [10], [13]. Unfortunately, despite its simple and intuitive nature, this assumption has resisted most attempts at a rigorous proof, thereby giving birth to different approaches, such as the one in [11]. Nevertheless, the results obtained there are in agreement with the ones obtained with the help of the Coulomb Gas assumption and, hence, we feel that our posit here is rather mild (see also appendix B for a more detailed discussion).

At any rate, in light of the above, we may now write the energy function $E[\lambda]$ as a functional over the continuous charge densities p :

$$\begin{aligned} \mathcal{E}[p] &= \int x p(x) dx - (\beta - 1) \int p(x) \log x dx \\ &- \iint p(x) p(y) \log |x - y| dx dy \end{aligned} \quad (13)$$

However, to make proper use of the energy functional $\mathcal{E}$ (13) we must first make sure that it remains finite over a reasonably large class of densities $p(x)$. This leads us to the concept of “tameness”:

Definition 2. An integrable function $p : \mathbb{R}_+ \rightarrow \mathbb{R}$ will be called ε -tame when:

(i) the “absolute mean” of p is finite:

$$\int_0^\infty x |p(x)| dx < \infty; \quad (14)$$

(ii) there exists some $\varepsilon > 0$ such that p is $L^{1+\varepsilon}$ -integrable, i.e.

$$\int_0^\infty |p(x)|^{1+\varepsilon} dx < \infty. \quad (15)$$

Remark 2.1. The phrasing of condition (i) simply reflects our interest in tame functions $p \equiv p_X$ that are probability densities of random variables X with values in $\mathbb{R}_+$. In that case, condition (i) simply states that X has finite mean:

$$\mathbb{E}(X) = \int_0^\infty x p(x) dx < \infty. \quad (14')$$

Remark 2.2. Condition (ii) will be crucial to our analysis. At first, it might appear as a mere technical necessity (see e.g. section II-B and appendix C) but, in fact, it has a very deep physical interpretation: a probability density with finite mean might fail to have finite energy, making it inadmissible on physical grounds (see lemma 3 below).

Remark 2.3. When it is not necessary to make explicit mention of the exponent ε , we will simply say that p is *tame*. Similarly, an absolutely continuous (signed) measure σ on $\mathbb{R}_+$ will be called *tame* when its Lebesgue derivative $p(x) = \frac{d\sigma(x)}{dx}$ is tame. Given this equivalence, we will use the two terms interchangeably.

Going back to the energy functional $\mathcal{E}$ of (13), we can see that condition (i) guarantees that the first term in (13) is finite, while (ii) bounds the second and third terms. This is captured in the following:

Lemma 3 (Finiteness and Continuity of $\mathcal{E}$). *Let Ω be the space of tame functions on $\mathbb{R}_+$ and let $\mathcal{E}$ be defined as in (13). Then, $\mathcal{E}[p] < \infty$ for all $p \in \Omega$ and the restriction of $\mathcal{E}$ to any subspace of $L^{1+\varepsilon}$ -integrable functions with finite mean is continuous (in the $L^{1+\varepsilon}$ norm). In other words, tame densities have finite energy and tame variations in density induce small variations in energy.*

We prove this lemma in appendix A, where we also give some background information on the L^r norms. For now, it will be more useful to express the probability density $P_N(r)$ as the ratio:

$$P_N(r) = \frac{\mathcal{Z}_r}{\mathcal{Z}} \quad (16)$$

where, in accordance with (8), (11) and (13), $\mathcal{Z}_r$ and $\mathcal{Z}$ are the *partition functions*:³

$$\mathcal{Z}_r = \int_{\mathcal{X}_r} \mathcal{D}p e^{-N^2 \mathcal{E}[p]} \quad (17)$$

$$\mathcal{Z} = \int_{\mathcal{X}} \mathcal{D}p e^{-N^2 \mathcal{E}[p]} \quad (18)$$

and $\mathcal{D}p$ denotes the path-integral measure over the domains of tame densities $\mathcal{X}, \mathcal{X}_r \subseteq \Omega$:

$$\mathcal{X} = \left\{ p \in \Omega : p \geq 0 \text{ and } \int p(x) dx = 1 \right\} \quad (19)$$

$$\mathcal{X}_r = \left\{ p \in \mathcal{X} : \int p(x) \log(1 + \rho x) dx = r \right\}. \quad (20)$$

³It is worth pointing out that the correction to the term $N^2 \mathcal{E}[p]$ in the exponent is $\mathcal{O}(1)$ (see appendix B for more details). Also a nice analysis of the mapping from the λ integrals to path integrals over p can also be found in [14].

Of course, from a mathematical point of view, constructing a measure $\mathcal{D}p$ over the infinite-dimensional space of functions is an intricate process which is far from trivial. One way to go about this is similar to the construction of the Wiener measure for Brownian motion: indeed, Ω can be considered as a subspace of $\mathbb{R}^{[0,\infty)}$, and we may thus employ standard measure-theoretic techniques (e.g. theorem 3 pp. 148–149 in Shiryaev [18]) to obtain $\mathcal{D}p$ after we define it on the “cylinder sets” $\mathcal{S}_{x_1,\dots,x_k}(F_1,\dots,F_k) := \{p : p(x_1) \in F_1 \dots p(x_k) \in F_k\} \subseteq \Omega$. However, given that this is a highly involved and technical construction that adds little of substance to the result, we prefer to follow a more intuitive approach instead; a more in-depth discussion and further details are to be found in appendix B.

With all these considerations taken into account, we may take the large N limit and write:

$$\lim_{N \rightarrow \infty} \frac{1}{N^2} \log P_N(r) = \lim_{N \rightarrow \infty} \frac{1}{N^2} (\log \mathcal{Z}_r - \log \mathcal{Z}) \quad (21)$$

and, by invoking Varadhan’s lemma [19], we obtain:

$$\lim_{N \rightarrow \infty} \frac{1}{N^2} \log P_N(r) = \mathcal{E}_0 - \mathcal{E}_1(r) \quad (22)$$

or, equivalently:

$$P_N(r) \sim e^{-N^2(\mathcal{E}_1(r) - \mathcal{E}_0)} \quad (23)$$

where

$$\mathcal{E}_0 = \inf_{p \in \mathcal{X}} \mathcal{E}[p] \quad (24)$$

$$\mathcal{E}_1(r) = \inf_{p \in \mathcal{X}_r} \mathcal{E}[p] \quad (25)$$

In other words, we have reduced the problem of determining the asymptotic behavior of $P_N(r)$ to finding the minimum of the convex functional $\mathcal{E}$ over the two convex domains $\mathcal{X}$ and $\mathcal{X}_r$. To that end, we have:

Lemma 4 (Convexity of $\mathcal{E}$). *Let $\mathcal{X} \subseteq \Omega$ be the set of tame probability measures: $\mathcal{X} = \{p \in \Omega : p \geq 0 \text{ and } \int p(x) dx = 1\}$. Then, $\mathcal{X}$ is a convex subset of the topological vector space Ω and $\mathcal{E}$ is (strictly) convex on $\mathcal{X}$.*

Again, we will postpone the proof of this lemma until appendix A. However, an immediate corollary is that there exists a unique charge density p which minimizes (24) and (25). To find this unique solution - and the corresponding (global) minima $\mathcal{E}_0, \mathcal{E}_1(r)$ - it turns out to be more convenient to work over the whole space of tame measures Ω and introduce Lagrange multipliers for the two domains $\mathcal{X}$ and $\mathcal{X}_r$. This leads to the Lagrangian functions:

$$\begin{aligned} \mathcal{L}_0[p, \nu, c] &= \mathcal{E}[p] \\ &- \int_0^\infty \nu(x) p(x) dx - c \left(\int_0^\infty p(x) dx - 1 \right) \end{aligned} \quad (26)$$

$$\begin{aligned} \mathcal{L}_1[p, \nu, c, k] &= \mathcal{L}_0[p, \nu, c] \\ &- k \left(\int_0^\infty p(x) \log(1 + \rho x) dx - r \right) \end{aligned} \quad (27)$$

from which we obtain $\mathcal{E}_0$ and $\mathcal{E}_1(r)$ by maximizing over the dual parameters ν (non-negativity constraint), c (normalization) and k (mutual information):

$$\mathcal{E}_0 = \sup_{\nu \geq 0; c} \inf_p \mathcal{L}_0[p, \nu, c] \quad (28)$$

$$\mathcal{E}_1(r) = \sup_{\nu \geq 0; c, k} \inf_p \mathcal{L}_1[p, \nu, c, k] \quad (29)$$

The convexity of $\mathcal{L}_0, \mathcal{L}_1$ over p ensures that it suffices to find a local minimum $p(x)$ for the corresponding Lagrangian $\mathcal{L}$, for fixed ν, c, k . Then, any solution of k, c that satisfies the constraints of p will be unique [20]. It is also worth pointing out that the only difference between $\mathcal{E}_0$ and $\mathcal{E}_1$ above is that the former can be seen as the maximum over $\mathcal{L}_1[p, \nu, c, k]$ keeping $k = 0$; this relation will come in handy later, because it allows us to work with $\mathcal{L}_1$ and at the very last step set $k = 0$ to obtain $\mathcal{E}_0$.

We are now left to find a local minimum of $\mathcal{L}_1$ and the easiest way to do this is by looking at its functional derivative w.r.t. p . Indeed, recall that the functional derivative of $\mathcal{L}_1$ at $p \in \mathcal{X}_r$ is the distribution $\delta \mathcal{L}_1[p, \nu, c, k]$ whose action on test functions $\phi \in \Omega$ is given by:⁴

$$\langle \delta \mathcal{L}_1[p], \phi \rangle = \left. \frac{d}{dt} \right|_{t=0} \mathcal{L}_1[p + t\phi]. \quad (30)$$

Note now that the expression $\mathcal{L}_1[p + t\phi]$ is well-defined for all $p \in \mathcal{X}_r, \phi \in \Omega$ thanks to lemma 3 so that, at least, it makes sense to study its behavior as $t \rightarrow 0$. In addition to that, our convexity result (lemma 4) simplifies things even more because, if $\delta \mathcal{L}_1[p] = 0$ for some $p \in \mathcal{X}_r$, it immediately follows that $\mathcal{L}_1$ will be attaining its global minimum at p .⁵ Then, maximizing the result with respect to k and c simply corresponds to enforcing the normalization and mutual information constraints that appear in (26) and (27):

$$\int_0^\infty p(x) dx = 1 \quad (31)$$

$$\int_0^\infty p(x) \log(1 + \rho x) dx = r \quad (32)$$

Furthermore, we must also maximize with respect to ν , in order to ensure that $p(x)$ be non-negative in $\mathbb{R}_+$. This optimization constraint can be enforced by observing that $\nu(x) = 0$ when $p(x) > 0$ and vice-versa, as we shall see below.

At any rate, once we manage to find a solution to the above optimization problem, we will have:

Proposition 5 (Uniqueness of Solution). *Assume that the tame probability measure p satisfies the stationarity condition:*

$$\delta \mathcal{L}[p] = 0 \quad (\text{resp. } \delta \mathcal{L}_1[p] = 0) \quad (33)$$

along with the constraint (31) (resp. (31), (32)). Then, p is the unique global minimum point of (24) (resp. (25)).

This proposition stems directly from the convexity of $\mathcal{E}$ and will be of considerable help to us in what follows because it

⁴Since Ω is a locally convex space, this is just another guise of the Gâteaux/Fréchet derivatives.

⁵Indeed, note that the function $w(t) = \mathcal{L}_1[p + t(q - p)]$, $t \in [0, 1]$ is strictly convex in $[0, 1]$ for any choice of p and q in $\mathcal{X}_r$. Thus, if there were some $q \in \mathcal{X}_r$ with $\mathcal{L}_1[q] < \mathcal{L}_1[p]$, we would have $w'(0) = 0$ (on account of (30)) but also $w(0) > w(1)$, a contradiction.

ensures that any stationary point of $\mathcal{L}, \mathcal{L}_1$ which satisfies the relevant constraints will be the (unique) solution to our original minimization problem.

B. Solving the Integral Equation

Our task now will be to actually *find* the solution of (30), subject to the constraints (31), (32). The solution for $\mathcal{E}_0$ in (28) can then be obtained by relaxing the constraint (32) and setting $k = 0$ in the final result. To that end, a brief calculation (see appendix C) for the functional derivative for the functional derivative $\delta\mathcal{L}_1[p]$ of (30) yields the integral equation:

$$2 \int_0^\infty p(x') \log|x - x'| dx' = x - (\beta - 1) \log x - c - k \log(1 + \rho x) - \nu(x). \quad (34)$$

The role of $\nu(x)$ in the above equation is to enforce the inequality constraint $p(x) \geq 0$ for all $x \geq 0$. It is well known [20] that $\nu(x) > 0$ only when the probability density $p(x)$ vanishes, while when the probability density is positive, $\nu(x)$ has to be zero.

Of course, solving the above integral equation is no simple task, since the inversion process depends on the support $\text{supp}(p)$ of the density $p(x)$. As discussed in the previous subsection (and with a fair amount of hindsight gained from the Coulomb gas analogy), we will be looking for compactly supported solutions that are continuous in $(0, \infty)$; in other words, we will be assuming that $\text{supp}(f) = [a, b]$ where $0 \leq a < b < \infty$.

There is one important issue that must be mentioned here: when the dimensions of the channel matrix attain the critical value $\beta = 1$, we will see that p exhibits two different behaviors depending on the rate r . On one hand, we could have $a > 0$ which, by continuity, introduces the constraint $p(a) = 0$; on the other hand, we could also have solutions with $a = 0$ (which impose no extra constraints because p is assumed continuous only on $(0, \infty)$). If the rate r is greater than some critical value r_c , it turns out that solutions with $a > 0$ must be rejected because they attain negative values. In that case, we are led to solutions with $a = 0$ which have no such problems; the converse happens when $r < r_c$, and when $r = r_c$ the two solutions coincide.

Having said all that, we may now return to (34), where we have $\nu > 0$ if and only if $p = 0$. Thus, by restricting x to lie in the interval $[a, b]$, we may henceforth ignore $\nu(x)$ altogether. Furthermore, to eliminate c for the moment, a differentiation of (34) with respect to x yields:

$$2\mathcal{P} \int_a^b \frac{p(x')}{x - x'} dx' = 1 - \frac{\beta - 1}{x} - \frac{k}{x + z} \equiv f(x) \quad (35)$$

where $z = 1/\rho$ and $\mathcal{P}$ denotes the principal value of the integral (it appears because of the absolute value $|x' - x|$ in (34) above); also, for technical reasons, we will need the domain of f to be all of $\mathbb{R}$ and we thus set $f \equiv 0$ outside $[a, b]$.

The above equation has a straightforward physical meaning: it represents a balance of forces at every location $a \leq x < b$, because the repulsion from all other charges of the distribution located at x' (the LHS expression) is equal to the external

forces (RHS). For $\beta > 1$ we intuitively expect that $p(x)$ must vanish at $x = 0$ because in this case the force from the finite charge density located at $x = 0$ (the second term of (35)) would be infinite. As a result, we intuitively expect that $a > 0$ for all $\beta > 1$; this expectation will be vindicated shortly.

Indeed, the solution of this integral equation for general $f(x)$ can be obtained using standard methods from the theory of integral equations [21], [22]. So as not to interrupt the presentation, we will postpone the details until appendix C and will only give the final result here:

$$p(x) = \frac{\mathcal{P} \int_a^b \frac{\sqrt{(y-a)(b-y)} f(y)}{y-x} dy + C'}{2\pi^2 \sqrt{(x-a)(b-x)}} - x - \frac{k \sqrt{(a+z)(b+z)}}{x+z} - \frac{(\beta-1) \sqrt{ab}}{x} + C \quad (36)$$

where C, C' are unknown constants to be determined by the condition $p(b) = 0$.

As we explain in appendix C, this formula is valid only when the function f is itself L^r -integrable for some $r > 1$. This is always true if $\beta = 1$ but, as we have already hinted at, this case has its own set of subtleties, analysed at length in section III-C. In particular, we obtain two different solutions depending on whether the support of p extends to 0 or not (imposing the constraints $a = 0$ or $p(a) = 0$ respectively), but only one of them is physically admissible (i.e. is a tame probability measure lying in the rate-constrained domain $\mathcal{X}_r$).

On the other hand, this dichotomy ceases to exist when $\beta > 1$. Indeed, if $\beta > 1$ and $a = 0$, the LHS of (35) is no longer integrable. However, the RHS of (35) is $L^{1+\varepsilon}$ -integrable whenever p is ε -tame itself, on account of the properties of the finite Hilbert transform [22] (see also appendix C). We thus conclude that any solution to (35) whose support extends to 0 cannot be tame and will thus have to be rejected by default. As a result, the support of p for $\beta > 1$ has to be bounded away from 0, thus leading to the constraint $p(a) = 0$ and proving our intuitive expectation above.

So, starting with the general case $a, b > 0$, we find that the constraint of continuity requires that the distribution $p(x)$ vanish at the endpoints a, b of its support. The condition $p(b) = 0$ determines the value of C in (36) resulting in the following form for $p(x)$:

$$p(x) = \frac{\sqrt{b-x}}{2\pi \sqrt{x-a}} \left(1 - \frac{k}{(x+z)} \sqrt{\frac{a+z}{b+z}} - \frac{\beta-1}{x} \sqrt{\frac{a}{b}} \right) \quad (37)$$

The additional condition $p(a) = 0$ (when $a > 0$) results to

$$p(x) = \frac{1}{2\pi} \frac{\sqrt{(b-x)(x-a)}}{x(x+z)} \left(x + \frac{\beta-1}{\sqrt{ab}} z \right) \quad (38)$$

with the value of a determined (as a function of b and k) by the equation:

$$\frac{k}{\sqrt{(a+z)(b+z)}} + \frac{\beta-1}{\sqrt{ab}} = 1. \quad (39)$$

Demanding that p be properly normalized as in (31), imposes the constraint:

$$\int_a^b p(x) dx = \frac{a+b-2k-2(\beta-1)}{4} + \frac{zk}{2\sqrt{(z+a)(z+b)}} = 1. \quad (40)$$

In appendix D we show that (39) and (40) admit a unique solution a, b for any given k and, as a result, proposition 5 guarantees the existence of a (necessarily unique) density $p(x)$ that minimizes (29).

Now, given the resulting solution $p(x)$ we can readily calculate the minimum energy $\mathcal{E}[p]$ itself:

$$\begin{aligned}\mathcal{E}[p] &= \int_a^b x p(x) dx - (\beta - 1) \int_a^b p(x) \log x dx \\ &\quad - \iint_{[a,b]^2} p(x) p(y) \log |x - y| dy dx \\ &= \frac{1}{2} \int_a^b x p(x) dx - \frac{\beta - 1}{2} \int_a^b p(x) \log x dx \\ &\quad + \frac{k}{2} \int_a^b p(x) \log(1 + \rho x) dx + \frac{c}{2}\end{aligned}\quad (41)$$

where in the second line we eliminated the double integral by substituting it from (34) [13]. As for the value of c itself, it can be determined by evaluating (34) at a fixed value of x , say $x = a$:

$$\begin{aligned}c &= a - (\beta - 1) \log a - k \log(1 + \rho a) \\ &\quad - 2 \int_a^b \log(x - a) p(x) dx\end{aligned}\quad (42)$$

Inserting this in (41) then yields:

$$\begin{aligned}\mathcal{E}[p] &= \frac{1}{2} \int_a^b x p(x) dx - \frac{\beta - 1}{2} \int_a^b p(x) \log x dx \\ &\quad - \int_a^b p(x) \log(x - a) dx \\ &\quad + \frac{1}{2} (k(r - \log(1 + \rho a)) + a - (\beta - 1) \log a)\end{aligned}\quad (43)$$

III. RESULTS

A. Marčenko-Pastur Distribution

Now, before actually deriving $\mathcal{E}_1$ for general values of ρ and r , it is instructive to calculate the most probable distribution of eigenvalues without any mutual information constraints, i.e. the well-known Marčenko-Pastur distribution. This can be immediately extracted from the analysis in Section II-B by setting $k = 0$. Solving for a, b in (39), (40) gives

$$\begin{aligned}a &= (\sqrt{\beta} - 1)^2 \\ b &= (\sqrt{\beta} + 1)^2\end{aligned}\quad (44)$$

and (38) then takes the well-known form (3). Note that when $\beta = 1$, the lower endpoint vanishes ($a = 0$) and a square-root (integrable) singularity appears in $p(x)$ in (3). We may also evaluate the energy functional $\mathcal{E}_0$ using from (43) by setting $k = 0$. In this way, we get:

$$\begin{aligned}\mathcal{E}_0 &= \frac{1}{2} \int_a^b x p(x) dx + \frac{1}{2} (a - (\beta - 1) \log a) \\ &\quad - \frac{\beta - 1}{2} \int_a^b p(x) \log x dx - \int_a^b p(x) \log(x - a) dx\end{aligned}\quad (45)$$

and, after some algebra, we can rewrite the above expression in the closed form:

$$\begin{aligned}\mathcal{E}_0 &= \frac{\Delta^2}{32} + \frac{a}{2} - \log \Delta - \frac{\beta - 1}{2} \log(a \Delta) \\ &\quad - \frac{\Delta}{2} \left[Q\left(0, \frac{a}{\Delta}\right) + \frac{\beta - 1}{2} Q\left(\frac{a}{\Delta}, \frac{a}{\Delta}\right) \right]\end{aligned}\quad (46)$$

where $\Delta \equiv b - a$ and the function $Q(x, y)$ is given by [23]:

$$\begin{aligned}Q(x, y) &= \frac{1}{\pi} \int_0^1 \sqrt{t(1-t)} \frac{\log(t+x)}{t+y} dt \\ &= -2 \sqrt{y(1+y)} \log \left[\frac{\sqrt{x(1+y)} + \sqrt{y(1+x)}}{\sqrt{1+y} + \sqrt{y}} \right] \\ &\quad + (1+2y) \log \left[\frac{\sqrt{1+x} + \sqrt{x}}{2} \right] - \frac{1}{2} (\sqrt{1+x} - \sqrt{x})^2\end{aligned}\quad (47)$$

B. Generalized Marčenko-Pastur Distribution: $\beta > 1$

We will now present the results of our analysis, starting with the case $\beta > 1$. First off, it is worth commenting on (38) which gives the asymptotic density of eigenvalues constrained on the subspace with fixed total rate $R = Nr$ in the large N limit. It is quite remarkable that even away from the (most probable) Marčenko-Pastur distribution, the constrained eigenvalue distribution “hardens” to a deterministic one. In Fig. 1 we plot examples of such eigenvalue distributions. Finally, we can readily integrate (32) with $p(x)$ given by (38) to obtain

$$\begin{aligned}r &= \int_a^b p(x) \log(1 + \rho x) dx \\ &= \log \Delta \rho + \frac{\Delta k}{2 \sqrt{(z+a)(z+b)}} Q\left(\frac{a+z}{\Delta}, \frac{a+z}{\Delta}\right) \\ &\quad + \frac{\Delta}{2} \left(1 - \frac{k}{\sqrt{(z+a)(z+b)}} \right) Q\left(\frac{a+z}{\Delta}, \frac{a}{\Delta}\right)\end{aligned}\quad (48)$$

where $Q(x, y)$ is given in (47).

Based on the arguments discussed in the previous section, it suffices to show that there exists a distribution $p(x)$ in the form of (38) satisfying the constraints (31), (32). This corresponds to finding values of a, b , and k that satisfy (39), (40) and (48), while at the same time maintaining $p(x) \geq 0$ for all $x \in [a, b]$. If such a solution exists, according to Theorem 5, it will be the unique solution.

In Appendix D we show that equations (39) and (40) admit a unique solution for any k . We therefore only need to show that (48) has a solution in k for any $r > 0$. To do so we first see that for $k \rightarrow -\infty$ the solution of (39), (40) is $a \sim z(\sqrt{\beta} - 1)^2/|k|$ and $b \sim z(\sqrt{\beta} + 1)^2/|k|$; then, inserting these solutions into (48), we see that it becomes to leading order $r \sim \beta/|k|$. On the other hand, for $k \rightarrow \infty$ (39), (40) give $a \sim \sqrt{k + \beta - z/2} - 1$ and $b \sim \sqrt{k + \beta - z/2} + 1$, resulting to $r \sim \log k \rho$. Thus, the right-hand-side of (48) takes all values in $(0, \infty)$ as k spans the real line $(-\infty, \infty)$ and hence, due to the continuous nature of (48), we see that there exists a solution $k(r)$ for all $r > 0$. This shows that the corresponding solution $p(x; r)$ is the unique minimizing distribution of $\mathcal{E}$ in $\mathcal{X}_r$.

In Fig. 2 we compare this distribution with the corresponding empirical probability distribution function obtained by numerical simulations: the agreement is quite remarkable.

We may now calculate the value of $\mathcal{E}_1$. Starting from (43), plugging in $p(x)$ from (38), and finally integrating gives us:

$$\begin{aligned} \mathcal{E}_1 = & \frac{\Delta^2}{32} + \frac{a}{2} - \log \Delta - \frac{\beta-1}{2} \log(a\Delta) \\ & + \frac{k}{2} \left(r - \log(1 + \rho a) - \frac{z(\sqrt{b+z} - \sqrt{a+z})^2}{4\sqrt{(a+z)(b+z)}} \right) \\ & - \frac{\Delta k}{2\sqrt{(z+a)(z+b)}} \left[Q\left(0, \frac{a+z}{\Delta}\right) + \frac{\beta-1}{2} Q\left(\frac{a}{\Delta}, \frac{a+z}{\Delta}\right) \right] \\ & - \frac{\Delta}{2} \left(1 - \frac{k}{\sqrt{(z+a)(z+b)}} \right) \left[Q\left(0, \frac{a}{\Delta}\right) + \frac{\beta-1}{2} Q\left(\frac{a}{\Delta}, \frac{a}{\Delta}\right) \right] \end{aligned} \quad (49)$$

where $Q(x, y)$ is given by (47).

C. Generalized Marčenko-Pastur Distribution: $\beta = 1$

The case $\beta = 1$ deserves special attention. In this case the logarithmic repulsion from the δ -function density of eigenvalues at the origin in (13) and (34) is no longer present. Still, we may try to solve the problem as in the $\beta > 1$ case, i.e. by trying to find the endpoints a, b of the distribution's support in such a way that all constraints be satisfied. In this direction, it is straightforward to show that the support and normalization conditions (39) and (31) yield the following support endpoints for $\beta = 1$:

$$\begin{aligned} a &= (\sqrt{k+1} - 1)^2 - z \\ b &= (\sqrt{k+1} + 1)^2 - z. \end{aligned} \quad (50)$$

As a result, the probability density function p becomes:

$$p(x) = \frac{1}{2\pi} \frac{\sqrt{(b-x)(x-a)}}{x+z} \quad (51)$$

The value of the parameter k can be obtained in a unique way from the mutual information condition, which now reads:

$$r - \log \rho = (k+1) \log(k+1) - k \log k - 1. \quad (52)$$

In its turn, this can be used to evaluate the value of the outage exponent:

$$\mathcal{E}_1 - \mathcal{E}_0 = \frac{k-1}{2} (r - \log \rho) + k - \frac{1}{2} - z - \frac{k \log k}{2}. \quad (53)$$

We can immediately see that the above results can be problematic. While they are consistent for large enough k (and hence for large enough r) they do not hold for smaller k and r . Specifically, for $k < k_c(z) := z + 2\sqrt{z}$, the value of the lower limit of the support a becomes negative, which is unacceptable by definition. Accordingly, this analysis is only valid for $k > k_c(z)$ or, equivalently, for $r > r_c(z)$, where:

$$\begin{aligned} r_c(z) &:= -\log z - 1 + 2(\sqrt{z} + 1)^2 \log(\sqrt{z} + 1) \\ &- \sqrt{z}(\sqrt{z} + 2) \log(\sqrt{z}(\sqrt{z} + 2)) > r_{\text{erg}} \end{aligned} \quad (54)$$

For the opposite case ($r \leq r_c$) we can no longer allow a to be a free variable. Instead, because $p(x) = 0$ for $x < 0$, the charge density becomes confined at the boundary $x = 0$.

Thus, we need to look for solutions of (34) with $a = 0$; in that case, the charge density has a square-root singularity at $x = 0$ (instead of vanishing continuously). This is actually quite natural since we expect that, for $k = 0$ (or, equivalently, for $r = r_{\text{erg}}$), the charge distribution should take the form of the $\beta = 1$ Marčenko-Pastur density:

$$p(x) = \frac{\sqrt{4-x}}{2\pi\sqrt{x}}. \quad (55)$$

Indeed, for general b, k , the distribution becomes:

$$p(x) = \frac{\sqrt{b-x}}{2\pi(x+z)\sqrt{x}} \left(x+z - \frac{k\sqrt{z}}{\sqrt{b+z}} \right), \quad (56)$$

and the normalization condition (31) implies

$$k = \frac{\frac{b}{2} - 2}{1 - \frac{\sqrt{z}}{\sqrt{z+b}}} \quad (57)$$

It can easily be shown that (57) has a unique solution in b for all k . It is also rather straightforward to show that for $k > k_c(z)$ the constant term in the last parenthesis in (56) (namely $z - k\sqrt{z}/\sqrt{b+z}$) is negative. As a result, this solution is not valid for $k < k_c(z)$ because the charge density becomes negative at some point $x > 0$. We therefore see that, as a function of k , the two solutions above (one with $a > 0$ and the other with $a = 0$) are mutually exclusive.

In the last case ($a = 0$), the mutual information condition (32) implies:

$$\begin{aligned} r &= \log \rho + 2(k+1) \log \frac{\sqrt{z} + \sqrt{z+b}}{2} \\ &- \frac{1}{4} (\sqrt{z+b} - \sqrt{z})^2 - \frac{k}{2} \log(z(z+b)) \end{aligned} \quad (58)$$

and we can use this expression and (57) to obtain b and k . It is then easy to show that both r vs k equations above have at least one solution in the domain of their validity in k . Indeed, for $k \rightarrow -\infty$ (57) gives $b \sim 4z/|k|$, in which case (58) can be approximated by $r \sim 1/|k|$. In contrast, in the large k regime, (58) gives $r \sim \log k \rho$, just as in the $\beta > 1$ case and again, because of continuity, this guarantees the existence of a solution $k(r)$ for every $r > 0$.

After solving for b and k as a function of r and z , $\mathcal{E}_1$ can be readily calculated. Using the fact that $\mathcal{E}_0 = 3/2$, the exponent of the probability distribution $P(r)$ becomes:

$$\begin{aligned} \mathcal{E}_1 - \mathcal{E}_0 &= \frac{k}{2} \left(r - \log \rho - \frac{b}{2} \right) - \log \frac{b}{4} - k \log \frac{\sqrt{z+b} + \sqrt{z}}{2} \\ &+ \frac{1}{32} (b-4)(4z+3b+1) \end{aligned} \quad (59)$$

We thus see that $\mathcal{E}_1 = \mathcal{E}_0 = 3/2$ for $k = 0$ and $b = 4$.

It is also worthwhile to analyze the nature of the transition at $r = r_c$. Surprisingly, the transition is third-order in the sense that the first and the second derivatives of $\mathcal{E}_1(r)$ at $r = r_c$ are both continuous. If we denote $\mathcal{E}_{1\pm}(r)$ the exponent for $r \gtrless r_c$, respectively, and we expand it around $r = r_c$, we find that for small $r - r_c$

$$\mathcal{E}_{1\pm}(r_c + x) - \mathcal{E}_1(r_c) = a_1 x + \frac{1}{2} a_2 x^2 + \frac{1}{6} a_3 x^3 + \mathcal{O}(x^4) \quad (60)$$

where

$$a_1 = k_c \quad (61)$$

$$a_2 = \left[\log \left[\frac{k_c + 1}{k_c} \right] \right]^{-1} \quad (62)$$

$$a_{3+} = \left[(k_c + 1)k_c \left(\log \left[\frac{k_c + 1}{k_c} \right] \right)^3 \right]^{-1} \quad (63)$$

$$a_{3-} = -\frac{\sqrt{2}a_{3+}}{2} \quad (64)$$

D. Outage Probability

Due to the factor N^2 in the exponent of $P_{\text{out}}(r) \sim \exp[-N^2(\mathcal{E}_1(r) - \mathcal{E}_0)]$, $P(r)$ falls off rapidly away from its peak and it would be useful to include the normalization factor in front of the exponent. To do this we need to integrate $\exp[-N^2(\mathcal{E}_1(r) - \mathcal{E}_0)]$ over r . Despite the quite complex nature of the dependence of $\mathcal{E}_1$ on $r = R/N$ (which we have made explicit), this is a straightforward exercise due to the factor N^2 in the exponent. As we shall see in Section IV for r close to r_{erg} , $\mathcal{E}_1(r) - \mathcal{E}_0 \sim (r - r_{\text{erg}})^2 / v_{\text{erg}}$, where v_{erg} is the variance of the mutual information distribution. As a result, we may use Watson's lemma [24] (a special case of Varadhan's lemma), to evaluate the asymptotic value of the integral:

$$\int_0^\infty e^{-N^2(\mathcal{E}_1(r) - \mathcal{E}_0)} dr \sim \int_0^\infty e^{-\frac{N^2(r - r_{\text{erg}})^2}{2v_{\text{erg}}}} dr \sim \frac{\sqrt{2\pi v_{\text{erg}}}}{N} \quad (65)$$

As a result, we have

$$P(r) \sim \frac{1}{\sqrt{2\pi v_{\text{erg}}}} e^{-N^2(\mathcal{E}_1(r) - \mathcal{E}_0)} \quad (66)$$

To calculate the outage probability $P_{\text{out}}(r) = \mathbb{P}(I_N < Nr)$ to leading order in N , we first note that for $r < r_{\text{erg}}$, $\mathcal{E}_1(r)$ is a decreasing function of r . Therefore, the leading order behavior will be dominated by the value of the exponent at r . Using Watson's lemma once again we then obtain the following expression for the outage probability:

$$P_{\text{out}}(r) = \mathbb{P}(I_N < Nr) \sim \begin{cases} 1 - \frac{e^{-N^2(\mathcal{E}_1(r) - \mathcal{E}_0)}}{N|\mathcal{E}'_1(r)|} & r > r_{\text{erg}} \\ \frac{e^{-N^2(\mathcal{E}_1(r) - \mathcal{E}_0)}}{N|\mathcal{E}'_1(r)|} & r < r_{\text{erg}} \end{cases} \quad (67)$$

where $\mathcal{E}'_1(r)$ the derivative of $\mathcal{E}_1$ with respect to r . To leading order in N we see that the exponent of $P(r)$, i.e. $-N^2(\mathcal{E}_1(r) - \mathcal{E}_0)$ coincides with that of $P_{\text{out}}(r)$ for $r < r_{\text{erg}}$ and with the exponent of $1 - P_{\text{out}}(r)$ for $r > r_{\text{erg}}$.

In Fig. 3, we plot the logarithm of the probability density function (PDF) $P(r)$ as a function of the throughput r and we compare the result with the two other asymptotic forms, namely the Gaussian approximation of the mutual information [6] and the large- ρ asymptotic result given by (4) [1]. We see that our result performs much better at low outage, even at large $\rho = 100$. Fig. 4 shows more clearly the different trends of this curve compared to the other two approximations.

IV. ANALYSIS OF LIMITING CASES

It is worth analyzing the results of the previous section in specific limiting cases of the parameter space (ρ, r, β) . That way we make connection with already existing results

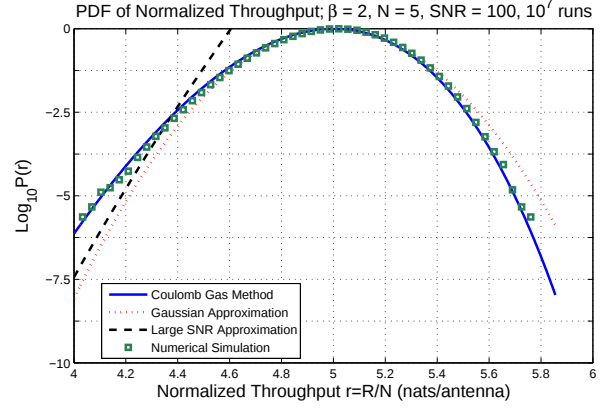


Fig. 3. Plot of the logarithm of the pdf of the mutual information I_N/N for $\beta = 2$ and comparison to the Gaussian approximation and the large- ρ asymptotic result obtained by Zheng and Tse given by (4) [1]. The numerical result for $N = 5$ follows closely our result, even at large $\rho = 100$.

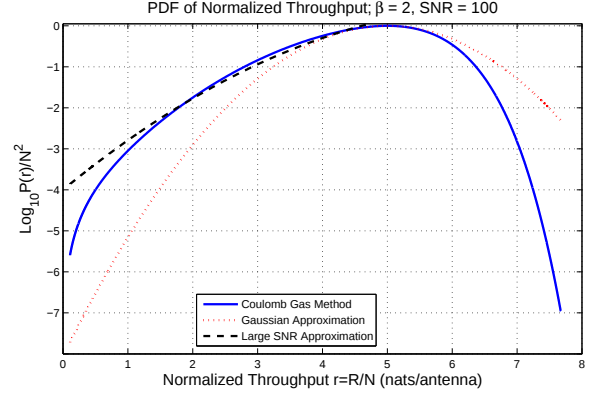


Fig. 4. Further comparison of our result for the pdf of the mutual information I_N/N with that of the Gaussian approximation and the Zheng - Tse result

in specific regions, and also describe the behavior of the probability density of $P(r)$ in other, unexplored regions, which hitherto have defied asymptotic analysis.

A. Gaussian Region $r \sim r_{\text{erg}}$

The most relevant limiting case is the Gaussian regime: after all, the Gaussian approximation as well as the present approach assume that the number of antennas N is large. The difference is that our approach does not focus only in the region of $N|r - r_{\text{erg}}| = \mathcal{O}(1)$, where the Gaussian approximation should be valid. To reach that limit, we need to analyze the small k region of (48), (58) since, in the limit $k = 0$, both equations reduce to $r = r_{\text{erg}}(\rho)$, where the normalized ergodic mutual information r_{erg} is well known to be: [5], [6], [25]

$$r_{\text{erg}} = \log u + \beta \log \left[1 + \frac{\rho}{u} \right] - (1 - u^{-1}) \quad (68)$$

with:

$$u = \frac{1}{2} \left(1 + \rho(\beta - 1) + \sqrt{(1 + \rho(\beta - 1))^2 + 4\rho} \right) \quad (69)$$

Expanding (48), (58) for small k we then get:

$$r = r_{\text{erg}} + kv_{\text{erg}} + \mathcal{O}(k^2) \quad (70)$$

where the quantity

$$v_{\text{erg}} = -\log \left[1 - \frac{(1-u)^2}{\beta u^2} \right] \quad (71)$$

coincides with the variance of the mutual information distribution as analyzed in [6], [8]. Expanding $\mathcal{E}_1 - \mathcal{E}_0$ for small k then yields

$$\mathcal{E}_1 - \mathcal{E}_0 = \frac{k}{2} (r - r_{\text{erg}}) + \mathcal{O}(k^3) \quad (72)$$

Plugging (70) into the above equation gives the following expression for the exponent of $P(r)$

$$\mathcal{E}_1 - \mathcal{E}_0 = \frac{(r - r_{\text{erg}})^2}{2v_{\text{erg}}} + \mathcal{O}\left((r - r_{\text{erg}})^3\right) \quad (73)$$

This is exactly the Gaussian limit of the mutual information distribution discussed in various papers in the past.

B. Large ρ Approximation: $r < r_{\text{erg}}$

Next we analyze the behavior of the probability distribution of r in the large ρ limit, while keeping the ratio $r/\log \rho$ finite and less than 1.⁶ Since in the large ρ limit $r_{\text{erg}} \sim \log \rho$, the region $q \leq 1$ with $\rho \gg 1$ corresponds to $k < 0$, equations (40), (39) will admit the following solutions for a, b :

$$a \sim \frac{(\beta - 1)^2 z}{4(1 - q)(\beta - q)} \quad (74)$$

$$b \sim 4q \quad (75)$$

where $q = r/\log \rho$ and we are assuming that $0 < q < 1$.

Now, note that the lower end of the spectrum has become of order $z = 1/\rho$, while the upper limit is still finite, just as expected. It is also interesting to calculate the proportion of eigenvalues that are in the neighborhood of $z = 1/\rho$ when $z \rightarrow 0$. Indeed, by integrating the probability distribution $p(x)$ (38) from $a = \mathcal{O}(z)$ (74) to Lz for some (arbitrarily) large L we get

$$\lim_{L \rightarrow \infty} \lim_{z \rightarrow 0} \mathbb{P}(x/z < L) = 1 - q \quad (76)$$

Thus, the proportion of “small” eigenvalues is simply $1 - q$, in agreement with [1]. Plugging (74), (75) into the equation for $\mathcal{E}_1$ then gives the expected result for the exponent:

$$\mathcal{E}_1 - \mathcal{E}_0 \sim \log \rho [(1 - q)(\beta - q)] \quad (77)$$

which is exactly the diversity exponent (divided by N^2) of [1].

Finally, it is worth comparing the two asymptotics discussed above. In the previous section the eigenvalue distribution did not deviate significantly from the most probable Marčenko-Pastur distribution, since k was assumed to be small. In contrast, here k is finite, equal to $k = 2q - 1 - \beta$ and the lower end of the distribution of eigenvalues in this subspace of fixed $r = q \log \rho$ has to become very small, of order $1/\rho$.

⁶This is the region analyzed in the diversity-multiplexing trade-off [1].

C. Large ρ Approximation: $r > r_{\text{erg}}$

The regime of large ρ and fixed $q = r/\log \rho \leq 1$ is relevant in the analysis of the link-level outage probability. However, the opposite regime of $q > 1$ is also of interest in a cellular setting with many multi-antenna users receiving data in a TDMA fashion from a single multi-antenna base-station.⁷ In this context, to analyze the system level throughput, it is the higher end of the probability distribution of the link-level mutual information that is important [7], [26]. Therefore, it is worthwhile to calculate the probability distribution of r for large ρ with $q > 1$.

Interestingly enough, the behavior here is quite different from the $q < 1$ case. Here $k \sim \rho^{q-1}$ and

$$a \sim (\sqrt{k + \beta} - 1)^2 \quad (78)$$

$$b \sim (\sqrt{k + \beta} + 1)^2 \quad (79)$$

resulting to

$$\mathcal{E}_1 - \mathcal{E}_0 \sim \rho^{q-1} = \frac{e^r}{\rho} \quad (80)$$

independent of β . The resulting probability distribution of r is

$$P(r) \sim e^{-N^2 e^r / \rho} \quad (81)$$

We see that when N is not too small, the probability of finding I_N significantly larger than its ergodic value is extremely small (in fact, doubly exponentially small in r). This is the manifestation of the fact that scheduling the best user in a MAC-layer in a multi-antenna setting does not seem to provide any clear advantage.

This result has the following intuitive explanation. For large ρ and $r > r_{\text{erg}}$ all eigenvalues of the matrix $\mathbf{H}^\dagger \mathbf{H}$ will be large and the only constraint imposed upon them is (32). Thus, we may say that all of them are constrained by the condition $r \sim \log(1 + \rho \lambda_i) \sim \log \rho \lambda_i$ i.e. $\lambda_i \sim e^r / \rho$. In this limit, the exponent is roughly N times the sum of the eigenvalues.

D. Limit $r \rightarrow 0$

The final regime that is interesting to analyze is when $r \rightarrow 0$, independently of ρ . This corresponds to the far left tail of the plots in Fig. 4 3. In this regime the solution of (48) (58) for small r is $r \sim \beta/|k|$ for $k \rightarrow -\infty$ and the corresponding values of a, b are:

$$a \sim \frac{z}{\beta} (\sqrt{\beta} - 1)^2 r \quad (82)$$

$$b \sim \frac{z}{\beta} (\sqrt{\beta} + 1)^2 r \quad (83)$$

resulting in:

$$\mathcal{E}_1 - \mathcal{E}_0 \sim -\beta \log \left[\frac{er}{\beta \rho} \right]. \quad (84)$$

This means that the probability distribution $P(r)$ has a tail of the form

$$P(r) \sim \left(\frac{re}{\rho \beta} \right)^{MN} \quad (85)$$

⁷In that case a MAC-layer scheduler would be transmitting to the user with the best channel, for example.

The above behavior of $P(r)$ for small r is easy to understand: for r to be small, we need all matrix elements of the matrix $\mathbf{H}$ to be small. In fact, since $\mathbf{H}$ appear in a quadratic way in the mutual information equation (2) we need all MN elements of $\mathbf{H}$ to be less than $\sim \sqrt{r/\rho}$. However, there are $2MN$ real degrees of freedom in the $M \times N$ complex matrix $\mathbf{H}$. Hence the allowed volume of space scales as $\sim (r/\rho)^{MN}$ as above.

It should also be noted that the behavior $P(r) \sim \rho^{-MN}$ of the mutual information cumulative distribution function is precisely what is known as the “full diversity” of error probability, i.e., the SNR exponent of error probability for fixed but very small rate R while SNR ρ increases is ρ^{-MN} , which corresponds to the left extreme point of the Zheng-Tse exponent [1].

V. CONCLUSION

In this paper we have used a large deviation approach, first introduced in the context of statistical mechanics [9], [13], to calculate the probability distribution of the mutual information of MIMO channels in the limit of large antenna numbers. In contrast to previous approaches that focused only close to the most probable eigenvalue distribution, [6]–[8], we also calculate the distribution for *rare events* in the tails of the distribution, corresponding to instances where the observed mutual information differs by $\mathcal{O}(N)$ from the most probable value of the asymptotic distribution (where the Gaussian approximation for the mutual information is invalid). We find that the distribution in those tails is markedly different from what happens near the mean and our resulting probability distribution interpolates seamlessly between the Gaussian approximation for rates close to the ergodic mutual information and the results of [1] for large signal to noise ratios (where the outage probability is given asymptotically by (4)). Our method thus provides an analytic tool to calculate outage probabilities at any point in the (R, ρ, N) parameter space, as long as N is not too small. Additionally, this approach also provides the probability distribution of eigenvalues constrained in the subspace where the mutual information is fixed to R for a given signal to noise ratio ρ . Interestingly, this eigenvalue density is of the form of the Marčenko-Pastur distribution with square-root singularities.

Finally, it is worth pointing out one very interesting generalization, namely to include the correlations of the channel, a problem which is considerably more difficult compared to the present one. Some preliminary mathematical tools have already been developed in [27], and we will expand on this in the future.

APPENDIX A

PROPERTIES OF TAME PROBABILITY MEASURES

This appendix is largely devoted to the study of the energy functional $\mathcal{E}$:

$$\begin{aligned} \mathcal{E}[p] = & \int x p(x) dx - (\beta - 1) \int p(x) \log x dx \\ & - \iint p(x) p(y) \log |x - y| dx dy \end{aligned} \quad (13)$$

where $p \in \Omega$ is a tame density. As evidenced by definition 2 where the concept of tameness was introduced, an extremely important part in our analysis will be played by the so-called L^r norm $\|\cdot\|_r$ defined by:

$$\|f\|_r := \left(\int |f(x)|^r dx \right)^{1/r}. \quad (86)$$

If a function f has finite L^r norm it is called L^r -integrable and the space of such functions constitutes a complete vector space (also denoted by L^r). The completeness of this space follows from Hölder’s inequality which we state without proof and which will be of great use to us [28]:

$$\|fg\|_1 \leq \|f\|_r \|g\|_s \quad (87)$$

whenever the exponents $r, s > 1$ are *conjugate*, that is: $r^{-1} + s^{-1} = 1$.

We will also make heavy use of the convolution $f * g$ between two functions f and g :

$$(f * g)(x) = \int f(x - y) g(y) dy. \quad (88)$$

If $f \in L^1$ and $g \in L^r$, *Young’s inequality* (pp. 240–241 in [28]) states that their convolution will be finite for almost every x and also that:

$$\|f * g\|_r \leq \|f\|_1 \|g\|_r. \quad (89)$$

We may now proceed with the proof of lemma 3 regarding the domain of $\mathcal{E}$ and its continuity properties:

Proof of Lemma 3: To show that $\mathcal{E}$ is finite for all tame functions $p \in \Omega$, we will study $\mathcal{E}[p]$ term by term. To that end, let $p : \mathbb{R}_+ \rightarrow \mathbb{R}$ be tame for some exponent $\varepsilon > 0$; that is, assume that $\int |p|^{1+\varepsilon} < \infty$ and that $\int x p(x) dx < \infty$. We then have:

- The first term of $\mathcal{E}[p]$ is finite by definition.
- The second term in (13) can be written as:

$$\begin{aligned} \left| \int p(x) \log x dx \right| &= \int |p(x) \log x| dx \\ &= \int_0^1 |p(x) \log x| dx + \int_1^\infty |p(x) \log x| dx. \end{aligned}$$

Since $\log x < x$ for $x > 1$, the second integral will be bounded from above by $\int x |p(x)| dx < \infty$. As for the first integral, set $r = 1 + \varepsilon$ and $s = 1 + \frac{1}{\varepsilon}$ so that $r^{-1} + s^{-1} = 1$. Now, if $\chi_{[0,1]}$ is the indicator function of $[0, 1]$, note that $\int \chi_{[0,1]} \log x|^s dx = \int_0^1 |\log x|^s dx < \infty$ for all $s > -1$. As a result, Hölder’s inequality yields:

$$\begin{aligned} \int_0^1 |p(x) \log x| dx &= \|p \cdot \chi_{[0,1]} \log\|_1 \\ &\leq \|p\|_{1+\varepsilon} \cdot \|\chi_{[0,1]} \log\|_{1+1/\varepsilon} < \infty \end{aligned} \quad (90)$$

on account of p being $L^{1+\varepsilon}$ -integrable.

- For the last term of $\mathcal{E}$, let $D_+ = \{(x, y) \in \mathbb{R}^2 : y > x\}$ and note that:

$$\begin{aligned} & \left| \iint p(x)p(y) \log|x-y| dy dx \right| \\ & \leq 2 \iint_{D_+} |p(x)p(y) \log|x-y|| dy dx \\ & = 2 \int_0^\infty |p(x)| \int_x^\infty |p(y) \cdot \log(y-x)| dy dx. \end{aligned} \quad (91)$$

Now, the innermost integral can be written in the form:

$$\begin{aligned} & \int_x^\infty |p(y)| \cdot |\log(y-x)| dy \\ & = \int_0^\infty |p(x+w) \cdot \log w| dw \\ & = \int_0^\infty |p(x+w)K(w)| dw + \int_1^\infty |p(x+w) \log w| dw \\ & \leq \int_0^\infty |p(y)|K(y-x) dy + \int_0^\infty |p(1+x+w) \log(1+w)| dw. \end{aligned} \quad (92)$$

where $K(w)$ is the kernel:

$$K(w) = \begin{cases} \log|w|, & 0 < w \leq 1 \\ 0, & \text{otherwise.} \end{cases} \quad (93)$$

As above, K will be L^s -integrable for all $s > -1$ and, in particular, for $s = 1 + \frac{1}{\varepsilon}$. Therefore, we will have:

$$\begin{aligned} & \int_0^\infty |p(x)| \int_0^\infty |p(y)|K(x-y) dy dx = \| |p| \cdot (|p| * |K|) \|_1 \\ & \leq \|p\|_{1+\varepsilon} \cdot \|p * K\|_{1+1/\varepsilon} \\ & \leq \|p\|_{1+\varepsilon} \cdot \|p\|_1 \cdot \|K\|_{1+1/\varepsilon} < \infty \end{aligned} \quad (94)$$

where the penultimate step is an application of Hölder's estimate and the last one follows from Young's inequality. Finally, the second integral of (92) can be estimated by:

$$\begin{aligned} & \int_0^\infty |p(1+x+w) \log(1+w)| dw \\ & \leq \int_0^\infty |p(1+x+w)|w dw \\ & \leq Cx \int_0^\infty w|p(w)| dw \end{aligned} \quad (95)$$

for some sufficiently large $C > 0$. Then, since p is tame (i.e. $\int w|p(w)| dw < \infty$), we may integrate (95) over x to finally obtain that $\mathcal{E}[p] < \infty$.

This completes the proof that $\mathcal{E}[p]$ is finite for all tame functions $p \in \Omega$. To show that $\mathcal{E}$ is continuous on all subspaces of $L^{1+\varepsilon}$ -integrable functions with finite absolute mean, it simply suffices to note that all our estimates of $\mathcal{E}[p]$ are bounded by the $L^{1+\varepsilon}$ norm of p . ■

Remark. If a function is in L^r for some $r > 1$ and has finite mean, it will necessarily be in L^1 as well; in this way, tame measures form a (dense) subspace Ω of $L^1(\mathbb{R}_+)$ that is similar to the union $\bigcup_{\varepsilon>0} L^{1+\varepsilon}$.

We will now prove Lemma 4 showing that $\mathcal{E}$ is not only continuous but also convex over the (convex) domain $\mathcal{X}$ of tame probability measures.

Proof of Lemma 4: Let $p, q \in \mathcal{X}$ be two tame probability measures and introduce the bilinear pairing:

$$\langle p, q \rangle = - \iint p(x)q(y) \log|x-y| dx dy \quad (96)$$

which is actually well-defined on the whole space Ω (as can be seen by the proof of lemma 3). Since the first two terms of $\mathcal{E}$ are linear (and hence convex), it will suffice to show that:

$$\langle (1-t)p + tq, (1-t)p + tq \rangle < (1-t)\langle p, p \rangle + t\langle q, q \rangle \quad (97)$$

for all $t \in (0, 1)$. Indeed, if we let $\phi = p - q \in \Omega$, equation (97) reduces to showing that the pairing $\langle \cdot, \cdot \rangle$ is an inner product on the subspace of densities with zero total charge, i.e. that:

$$\langle \phi, \phi \rangle > 0 \quad (98)$$

for any nonzero tame $\phi \in \Omega$ with $\int \phi(x) dx = \int (p(x) - q(x)) dx = 0$.

From the point of view of electrostatics, this is plain to see: after all $\langle \phi, \phi \rangle$ is just the self-energy of the charge density ϕ . More specifically, let us define $D_+ = \{(x, y) : x < y\}$ as in the proof of lemma 3. Then we will have:

$$\begin{aligned} \langle \phi, \phi \rangle & = -2 \iint_{D_+} \phi(x)\phi(y) \log|x-y| dx dy \\ & = -2 \int_0^\infty \phi(x) \int_0^x \phi(y) \log(x-y) dy dx \\ & > 2 \int_0^\infty \phi(x) \int_0^x \phi(y)(y-x) dy dx \end{aligned} \quad (99)$$

So, if we set $\Phi(x) = \int_0^x \phi(y) dy$ and integrate by parts, we get:

$$\begin{aligned} \langle \phi, \phi \rangle & > \int_0^\infty \phi(x) \int_0^x y\phi(y) dy dx - \int_0^\infty x\phi(x)\Phi(x) dx \\ & = - \int_0^\infty \phi(x) \left(\int_0^x \Phi(y) dy \right) dx \\ & = \int_0^\infty \Phi^2(x) dx - \Phi(\infty) \int_0^\infty \Phi(y) dy \\ & > 0 \end{aligned} \quad (100)$$

since $\Phi(\infty) \equiv \int_0^\infty \phi(x) dx = 0 = \Phi(0)$ on account of ϕ having zero total charge. ■

APPENDIX B

CONSTRUCTION OF THE COULOMB GAS MODEL

In this appendix we will briefly show how the transition from discrete to continuous eigenvalue measures discussed in Section II-A occurs. As in the main text, we will not present any formal proof here either. However, we will argue that treating the formally discrete distribution of eigenvalues appearing in (9), as continuous in the large N limit is quite reasonable. A more formal method showing the same result appears in [13]. The main reasoning, also discussed in the main text is that the external confining potentials defined by the first two terms in (9) or (13) are strong enough to overcome the logarithmic repulsion between eigenvalues (third term in (9)), and therefore guarantee that (with high probability) most of the eigenvalues will be confined in a finite width region near the minimum of the external potential. At the same time, this will mean that the eigenvalue density per unit length will

be scaling with N if N is large enough. As a result, this can be seen as a high-density limit and therefore the continuous approximation for the measure will be valid, at least close to configurations whose energy is low enough.

In the remainder of this section we will motivate the transition from the discrete to continuous eigenvalue densities and show what kind of terms we expect to see. We start by focusing in a finite region of eigenvalues of length D . We then divide the integration over λ_k in (10) in L segments of length ℓ , such that $L\ell = D$. The length of each segment ℓ has to be small enough so that the energy (9) can be well approximated with all eigenvalues within a given segment being placed at the endpoint of the segment. At the same time, it has to be large enough so that there is a macroscopic (i.e. $\mathcal{O}(N)$) number of eigenvalues inside each segment. In principle, at the end of this exercise we need to take the limit $\ell \rightarrow 0$ as well, however we will discuss the subtleties of this limit later on. As a result, the integral over $\mathcal{D}\lambda$ can be written as:

$$\int \mathcal{D}\lambda \sim \prod_{k=1}^N \left(\sum_{m_k=1}^L \ell \right) = \prod_{m=1}^L \left(\sum_{n_m=0}^N \right) \frac{N! \ell^N}{\prod_{m=1}^L n_m!} \quad (101)$$

$$\sim \prod_{m=1}^L \left(\sum_{n_m=0}^N \right) \exp \left[-N\ell \sum_m p(m\ell) \log(p(m\ell)) \right] \quad (102)$$

where n_m are the number of λ_k 's that appear in the m th segment, with constraint $\sum_m n_m = N$. The factorials appearing at the RHS of (101) are the number of ways the N eigenvalues can be re-arranged in L segments. This factor constitutes the entropy term and, for large N and n_m , we can apply Stirling's formula to get the exponent in (102) (where $p(m\ell) = n_m/(N\ell)$ is the fraction of eigenvalues per unit length appearing in segment m).

We next look at the form of the energy in (9)

$$\begin{aligned} E(\lambda) &\sim \ell \sum_m p(m\ell) (m\ell - (\beta - 1) \log m\ell) \\ &+ \ell^2 \sum_{m \neq m'} p(m\ell) p(m'\ell) \log |(m - m')\ell| \\ &+ \frac{\ell}{N} \sum_m p(m\ell) \log a_m \ell \end{aligned} \quad (103)$$

The last term captures the repulsing interaction between eigenvalues in the same segment m . The value of a_m represents the typical distance between eigenvalues in segment m in units of ℓ and therefore is a number of order unity. We may now let $\ell \rightarrow 0$, which will make the sums converge to integrals $\ell \sum_m \rightarrow \int dx$ and $p(m\ell)$ can be written as a continuous function $p(x)$. Representing the sum over all possible states (i.e. the product of sums in (102)) by $\int \mathcal{D}p$ we can now get

$$\mathcal{Z} \sim \int \mathcal{D}p e^{-N^2 \mathcal{E}[p]} e^{-N \int dx p(x) \log p(x)} e^{N \int dx p(x) \log d(x)} \quad (104)$$

where $d(x) = a_m \ell$ is the average distance between eigenvalues at the position $x = m\ell$. One can estimate this average inter-eigenvalue distance to be

$$d(x) \sim a_m \ell \sim \frac{1}{Np(x)} \quad (105)$$

This was first proposed by Dyson [9], [13], [16] and was shown explicitly more recently in [29]. It is remarkable that with this choice of $d(x)$ the $\mathcal{O}(N)$ dependence on $p(x)$ in the exponent of (104) vanishes. This surprising fact is true only for complex matrices [16] in which, up to uninteresting constants, the leading correction to the $N^2 \mathcal{E}[p]$ term in the exponent is $\mathcal{O}(1)$.

APPENDIX C

SOLUTION OF THE VARIATIONAL EQUATION

In this appendix, we give a more detailed account of the solution of the variational equation:

$$\delta \mathcal{L}_1[p] = 0$$

where $\mathcal{L}_1$ is the Lagrangian function of (27). To that end, if $\phi \in \Omega$ is tame, we get:

$$\begin{aligned} \mathcal{L}_1[p + t\phi] &= \mathcal{L}_1[p] + t\mathcal{L}_1[\phi] \\ &- 2t \iint \phi(x)p(y) \log |x - y| dy dx + \mathcal{O}(t^2) \end{aligned} \quad (106)$$

and a simple differentiation at $t = 0$ yields:

$$\begin{aligned} \langle \delta \mathcal{L}_1[p], \phi \rangle &= \frac{d}{dt} \Big|_{t=0} \mathcal{L}_1[p + t\phi] \\ &= \mathcal{L}_1[\phi] - 2 \iint \phi(x)p(y) \log |x - y| dy dx \\ &= \int \phi(x) \Psi[p, x] dx, \end{aligned} \quad (107)$$

where the expression $\Psi[p, x]$ is given by:

$$\begin{aligned} \Psi[p, x] &= 2 \int p(y) \log |x - y| dy - x \\ &+ (\beta - 1) \log x + c + k \log(1 + \rho x) + v(x). \end{aligned} \quad (108)$$

Thus, for the above expression to vanish identically for all $\phi \in \Omega$, we must have $\Psi[p, x] = 0$, and this is precisely (34):

$$\begin{aligned} 2 \int_0^\infty p(x') \log |x - x'| dx' &= x - (\beta - 1) \log x \\ &- c - k \log(1 + \rho x) - v(x). \end{aligned} \quad (34)$$

Having derived this stationarity equation in terms of p , we will devote the rest of this appendix to the expression (35) that is obtained after differentiating (34) above:

$$2\mathcal{P} \int_a^b \frac{p(y)}{x - y} dy = 1 - \frac{\beta - 1}{x} - \frac{k}{x + z} \equiv f(x) \quad (35)$$

for all $x \in [a, b]$ (cf. section II-B). This integral equation is known as the *airfoil equation* and can be studied with the help of the *finite* Hilbert transform [22]:

$$\mathcal{T}[\phi](x) = \mathcal{P} \int_{-1}^1 \frac{\phi(y)}{y - x} dy. \quad (109)$$

If $r > 1$, the $\mathcal{T}$ -transform maps L^r to L^r but, nevertheless, it lacks a unique inverse.⁸ Indeed, the kernel of $\mathcal{T}$ is spanned by the function $\omega(x) = (1 - x^2)^{-\frac{1}{2}}$: $\mathcal{T}[\omega](x) = 0$ for all $x \in (-1, 1)$.

⁸This is a remarkable difference from the case of the *infinite* Hilbert transform which integrates over all $\mathbb{R}$ and which is invertible [22].

Outside this kernel, the solutions ϕ to the airfoil equation $\mathcal{T}[\phi] = g$ with $\phi, g \in L^r[-1, 1]$ will satisfy [22]:

$$\phi(x) = -\frac{1}{\pi} \mathcal{P} \int_{-1}^1 \sqrt{\frac{1-y^2}{1-x^2}} \frac{g(y)}{y-x} dy + \frac{c}{\sqrt{1-x^2}} \quad (110)$$

where c is an arbitrary constant that stems from the fact that any two solutions of the airfoil equation differ by a multiple of $\omega(x) = (1-x^2)^{-\frac{1}{2}}$.

Hence, after rescaling the interval $[-1, 1]$ to $[a, b]$, the solution of the stationarity equation (35) will be given by:

$$p(x) = \frac{\mathcal{P} \int_a^b \frac{\sqrt{(y-a)(b-y)} f(y)}{y-x} dy + C'}{2\pi^2 \sqrt{(x-a)(b-x)}} \quad (111)$$

whenever f is itself $L^{1+\varepsilon}$ -integrable. So, by substituting $f(x) = 1 - \frac{\beta-1}{x} - \frac{k}{x+z}$ from (35) and performing one last integration, we obtain the final result (36).

It is worthwhile to mention here again how this procedure breaks down if we allow the support of p to extend to $a = 0$ for $\beta > 1$: in that case, the function f also extends all the way to $a = 0$ and the term $\frac{\beta-1}{x}$ makes it non-integrable. However, since the Hilbert transform preserves L^r -integrability for $r > 1$ and p is assumed tame (and hence $L^{1+\varepsilon}$ -integrable), equation (35) would equate an integrable function with a non-integrable one, thus yielding a contradiction. Therefore, as we stated in section II-B, solutions with $a = 0$ are physically inadmissible when $\beta > 1$.

APPENDIX D

PROOF OF UNIQUENESS OF SOLUTION OF (39),(40)

In order to show that (39), (40) admit a unique solution, we start by observing that for fixed k, β and z , (39) has a unique positive solution $a \leq b$. Then, from the implicit function theorem, this solution can be captured in terms of b by a smooth function $a(b)$ whose derivative can be obtained implicitly from (39) (and which is negative). With this in mind, the normalization integral $g(b) = \int_{a(b)}^b p(x) dx$ takes the form:

$$g(b) = \frac{a(b) + b}{4} + \frac{1}{2} \left(z - k - (\beta - 1) \left(1 + \frac{z}{\sqrt{a(b)b}} \right) \right)$$

and this is actually an increasing function of b . Indeed, after a somewhat painful calculation, one obtains:

$$g'(b) = \frac{1}{4} \left[1 + \frac{(\beta-1)z}{\sqrt{a(b)b^3}} \right] \frac{b-a(b)}{b+z} > 0 \quad (112)$$

However, with $a(b)$ decreasing and bounded below by 0, this last equation yields $g'(b) > 1/8$ for large enough b , i.e. $\lim_{b \rightarrow \infty} g(b) = +\infty$. So, by continuity, there will be a (necessarily) unique b^* such that $g(b^*) = 1$. Hence, the pair $a^* = a(b^*), b = b^*$ will be the unique solution to (39), (40).

REFERENCES

- [1] L. Zheng and D. N. C. Tse, "Diversity and multiplexing: A fundamental tradeoff in multiple-antenna channels," *IEEE Trans. Inform. Theory*, vol. 49, no. 5, pp. 1073–1096, May 2003.
- [2] G. J. Foschini and M. J. Gans, "On limits of wireless communications in a fading environment when using multiple antennas," *Wireless Personal Communications*, vol. 6, pp. 311–335, 1998.

- [3] I. E. Telatar, "Capacity of multi-antenna Gaussian channels," *European Transactions on Telecommunications and Related Technologies*, vol. 10, no. 6, pp. 585–596, Nov. 1999.
- [4] E. Biglieri, J. Proakis and S. Shamai, "Fading Channels: Information-Theoretic and Communications Aspects," *IEEE Trans. Inform. Theory*, vol. 44, no. 6, p. 2619, Oct. 1998.
- [5] P. B. Rapajic and D. Popescu, "Information capacity of a random signature multiple-input multiple-output channel," *IEEE Trans. Commun.*, vol. 48, no. 8, p. 1245, Aug. 2000.
- [6] A. L. Moustakas, S. H. Simon, and A. M. Sengupta, "MIMO capacity through correlated channels in the presence of correlated interferers and noise: A (not so) large N analysis," *IEEE Trans. Inform. Theory*, vol. 49, no. 10, pp. 2545–2561, Oct. 2003.
- [7] B. M. Hochwald, T. L. Marzetta, and V. Tarokh, "Multi-antenna channel hardening and its implications for rate feedback and scheduling," *IEEE Trans. Inform. Theory*, vol. 50, no. 9, pp. 1893–1909, Sept. 2004.
- [8] W. Hachem *et al.*, "A new approach for capacity analysis of large dimensional multi-antenna channels," *IEEE Trans. Inform. Theory*, vol. 54, pp. 3987–4004, Sep. 2008.
- [9] F. Dyson, "Statistical theory of the energy levels of complex systems. I," *J. Math. Phys.*, vol. 3, p. 140, 1962.
- [10] S. N. Majumdar, *Random Matrices, the Ulam Problem, Directed Polymers & Growth Models, and Sequence Matching*, ser. Les Houches, M. Mézard and J. P. Bouchaud, Eds. Elsevier, July 2006, vol. Complex Systems.
- [11] K. Johansson, "On fluctuations of eigenvalues of random hermitian matrices," *Duke Math. J.*, vol. 91, no. 1, pp. 151–204, 1998.
- [12] A. M. Tulino and S. Verdú, "Random matrix theory and wireless communications," *Foundations and Trends in Communications and Information Theory*, vol. 1, no. 1, pp. 1–182, 2004.
- [13] P. Vivo, S. N. Majumdar, and O. Bohigas, "Large deviations of the maximum eigenvalue in Wishart random matrices," *J. Phys. A*, vol. 40, pp. 4317–4337, 2007.
- [14] D. S. Dean and S. N. Majumdar, "Extreme value statistics of eigenvalues of Gaussian random matrices," *Phys. Rev E*, vol. 77, p. 041108, 2008.
- [15] A. Papoulis, *Probability, Random Variables, and Stochastic Processes*, 3rd ed. Singapore: McGraw-Hill, 1991.
- [16] M. L. Mehta, *Random Matrices*, 2nd ed. San Diego, CA: Academic Press, 1991.
- [17] S. H. Simon and A. L. Moustakas, "Optimizing MIMO systems with channel covariance feedback," *IEEE J. Select. Areas Commun.*, vol. 21, no. 3, Apr. 2003.
- [18] A. N. Shiryaev, *Probability*, 2nd ed. Springer, 1995.
- [19] A. Dembo and O. Zeitouni, *Large Deviations Techniques and Applications*. New York, USA: Springer-Verlag Inc., 1998.
- [20] S. Boyd and L. Vandenberghe, *Convex Optimization*. Cambridge Univ. Press, 2004.
- [21] S. G. Mikhlin, *Integral Equations*. New York: Pergamon, 1964.
- [22] F. G. Tricomi, *Integral Equations*. Pure Appl. Math V, London: Interscience, 1957.
- [23] Y. Chen and S. M. Manning, "Some eigenvalue distribution functions of the laguerre ensemble," *J. Phys. A: Math. Gen.*, vol. 29, pp. 7561–7579, 1996.
- [24] C. M. Bender and S. A. Orszag, *Advanced Mathematical Methods for Scientists and Engineers*. New York, NY: McGraw-Hill, 1978.
- [25] S. Verdú and S. Shamai, "Spectral efficiency of CDMA with random spreading," *IEEE Trans. Inform. Theory*, vol. 45, no. 2, pp. 622–640, Mar. 1999.
- [26] P. Bender *et al.*, "CDMA/HDR: A bandwidth-efficient high-speed wireless data service for nomadic users," *IEEE Communications Magazine*, pp. 70–77, Jul. 2000.
- [27] A. Matytsin, "On the large-N limit of the Itzykson-Zuber integral," *Nuclear Physics B411*, pp. 805–820, 1994.
- [28] G. B. Folland, *Real Analysis*, 2nd ed. Wiley-Interscience, 1999.
- [29] E. Brézin and A. Zee, "Universality of the correlations between eigenvalues of large random matrices," *Nuclear Physics B (FS)*, vol. 402, pp. 613–627, 1993.